PROLEDA™
Led Lighting Technology

INTERIOR LIGHTING
LUMINARIE SERIES

DOWNLIGHTS

ARIS




IP 40 IK 05

Technicial Specifications

Housing	: Aluminium Injection
Light Source	: Mid Power Led
Input Voltage	: 220-240V AC 50/60Hz
CRI	: >80
IP	: IP54
Diffuser	: Opal Diffuser
Colour Temperature	: 3000K / 4000K / 5000K / 6500K
Operating Temperature	: -40°C … +55°C
Ral Code	: Ral 9016
Ceiling Type	: Drywall / Clip-in / Rock wool


SIZE	POWER	LUMEN
4"	8W	1.000lm
4"	10W	1.250lm
4"	12W	1.500lm
6"	15W	1.875lm
6"	18W	2.250lm
6"	20W	2.500lm
8"	20W	2.500lm
8"	25W	3.125lm
8"	30W	3.750lm

Photometric Data



120°

Technical Drawing

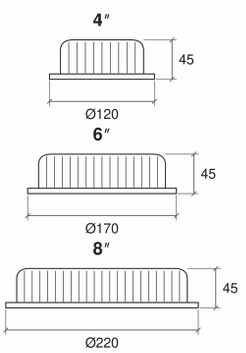

Dimensions (mm)

SIZE	OUTER DIA.	CUTOUT DIA.	HEIGHT
4″	120	100	45
6″	170	150	45
8″	220	200	45

Options

Driver	: Dali / 1-10V
Emergency Kit	: 1 hr/ 3 hr
Sensor	: Motion
IP	: IP65

Technical values have ±5% tolerance.

KARİNA