PROLEDA™
Led Lighting Technology

INTERIOR LIGHTING
LUMINARIE SERIES

SURFACE MOUNTED
GLOBE LUMINARIES

SATURN




IP 65 IK 05

Technicial Specifications

Housing	: Polycarbon
Light Source	: Mid Power Led
Input Voltage	: 220-240V AC 50/60Hz
CRI	: >80
IP	: IP65
Diffuser	Polycarbon
Colour Temperature	: 3000K / 4000K / 5000K / 6500K
Operating Temperature	: -40°C … +55°C
Ral Code	: Ral 9016


POWER	LUMEN
20W	2.520 lm

Photometric Data



120°

Technical Drawing

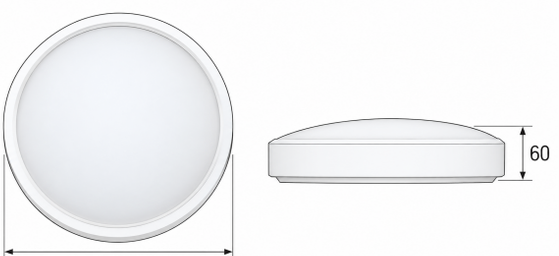

Options

Driver	: Dali / 1-10V
Emergency Kit	: 1 hr/ 3 hr
Sensor	: Radar

Technical values have ±5% tolerance.

KARİNA