PROLEDA™
Led Lighting Technology

OUTDOOR LIGHTING LUMINAIRE SERIES

ROAD LIGHTING

ETA

IP 66 IK 10






Technicial Specifications


Housing	: Aluminum Injection
Light Source	: Power Led / Mid Power Led
Input Voltage	: 220-240V AC 50/60Hz
CRI	: >80
IP	: IP66
Diffuser	: Tempered Glass
Colour Temperature	: 3000K / 4000K / 5000K / 6500K
Operating Temperature	: -40°C … +55°C
Optic	: 120°/ASYM
Weight	: 5,6kg
Ral Code	: Ral 7037

POWER	STANDARD LUMEN	PRO SERIES LUMEN
30W	4.260lm	4.334lm
45W	5.944lm	6.313lm
65W	8.632lm	9.111lm
80W	10.640lm	11.274lm
100W	13.236lm	14.020lm
125W	16.375lm	17.525lm

Photometric Data




120°



ASYMMETRIC

Technical Drawing

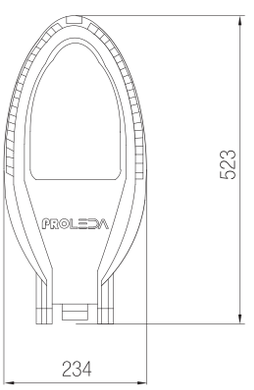

Dimensions (mm)

a	b	c
234mm	523mm	43mm

Options

Driver: Dali / 1-10V / AUTODIM

Parafodr

Technical values have ±5% tolerance.

KARİNA